
TRAILMAX





Usage Information

TrailMax products should be installed strictly in accordance with the instructions provided.

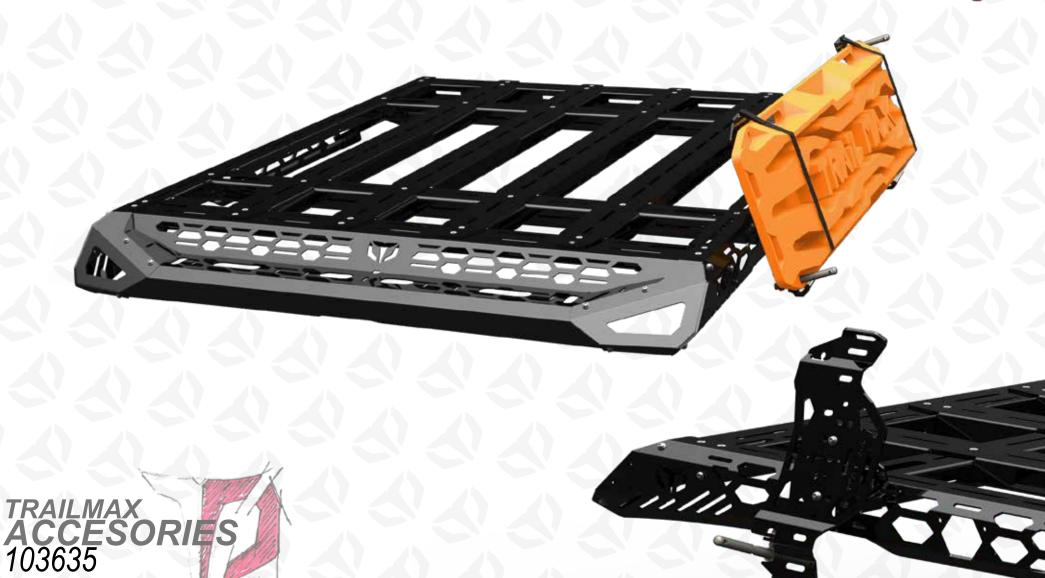

Manufacturer's load limit is to be used for weight allowance if it is lower than your TrailMax roof rack system.

*The weight of your roof rack system will count towards the manufacturer's load limit.




Do not modify any part of your TrailMax rack system. Do not install roof rack system onto previously modified roof.



Always ensure your load is securely fastened. Use only non stretch fastening ropes or straps to attach cargo to roof racks.




The load must be distributed evenly over the system to achieve maximum load and avoid destabilization while driving.

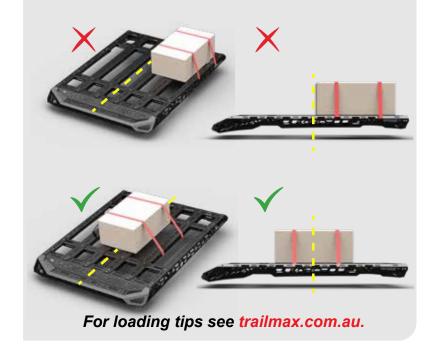




Discover the complete line of Trailmax accessories




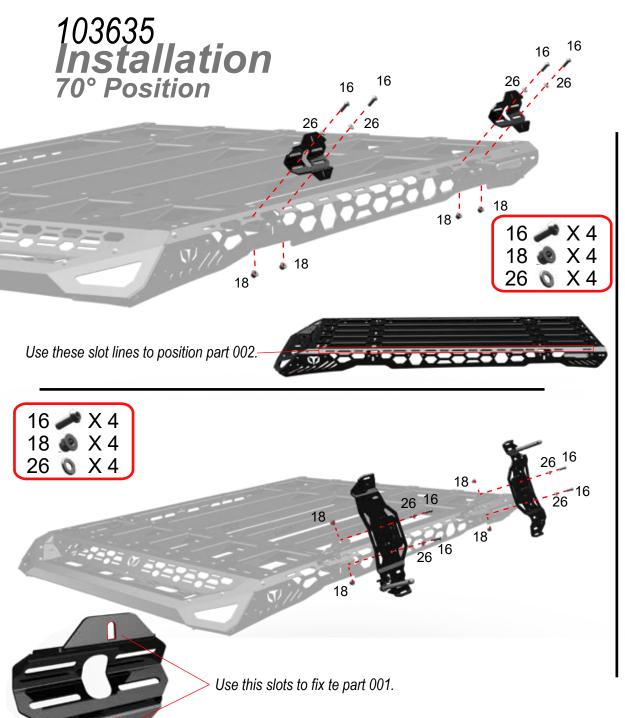




Use the measurement to position the brackets before fixing. Recovery Board measurements may vary depending on the brand.




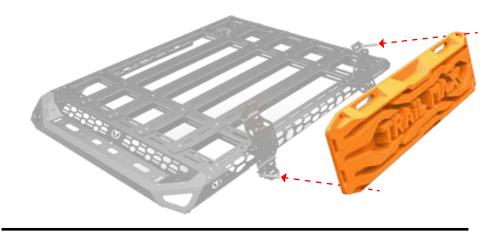




103635 Installation 20° Position

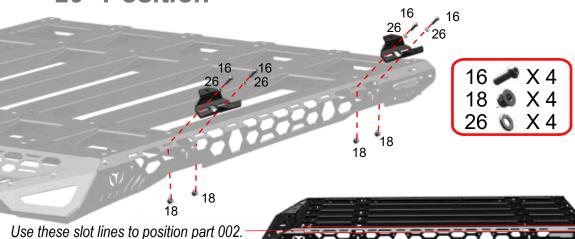


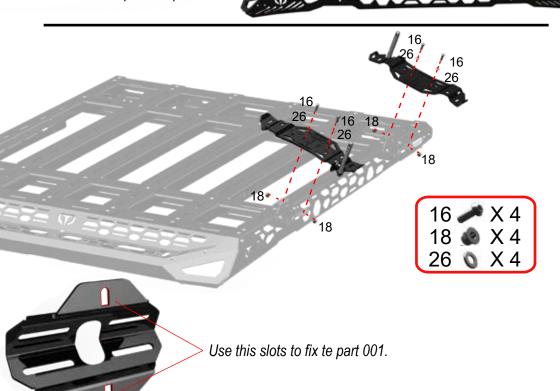




Use the measurement to position the brackets before fixing. Recovery Board measurements may vary depending on the brand.



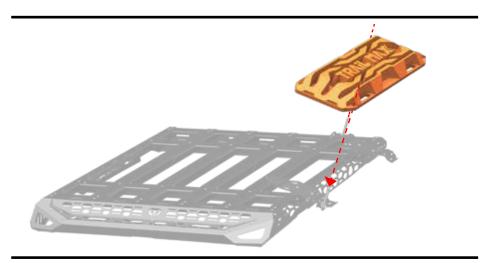




103635 Installation Standar Position

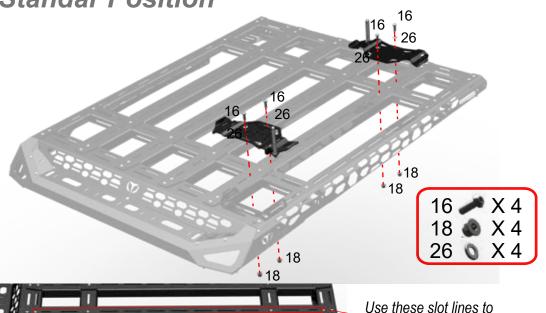


position part 001.




Use the measurement to position the brackets before fixing. Recovery Board measurements may vary depending on the brand.

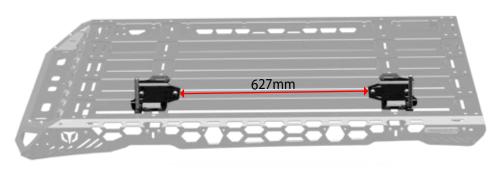

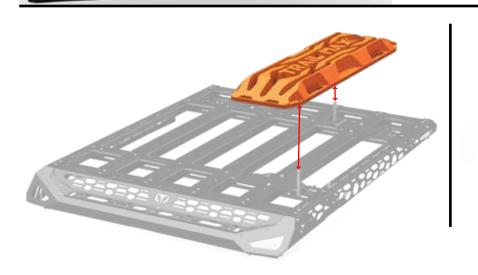



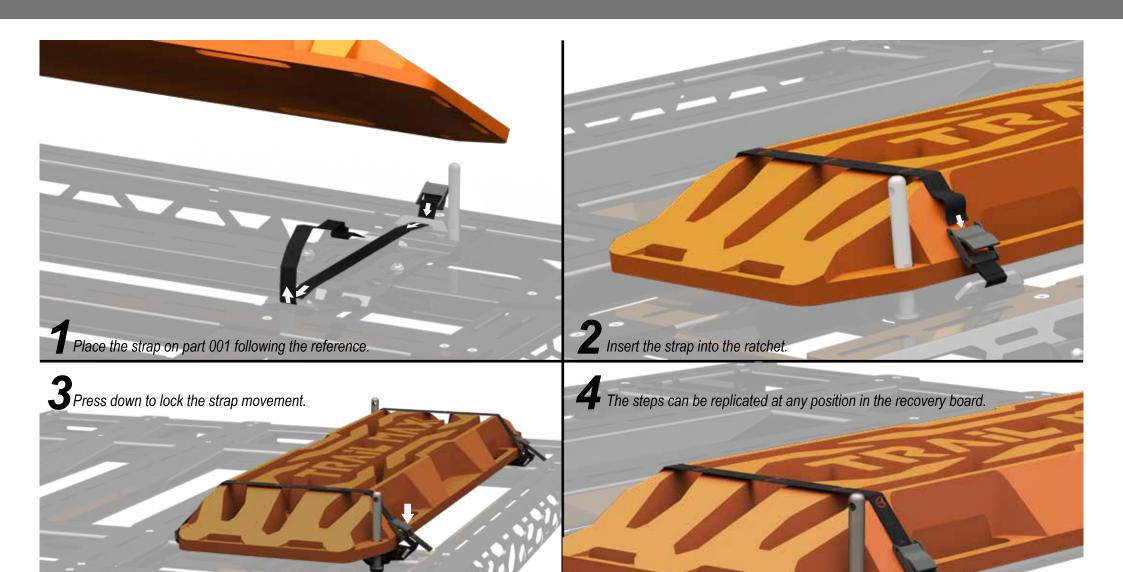













1300 885 841



