


WIRELESS REMOTE PAIRING

PROCESS TO PAIR YOUR REMOTE

PUT YOUR WINCH INTO FREE-SPOOL AS A PRECAUTION.

 Undo the small black cable (cable A) that runs from control box to the winch motor negative/ ground terminal. (It is on the same terminal as the large black negative lead from the battery).

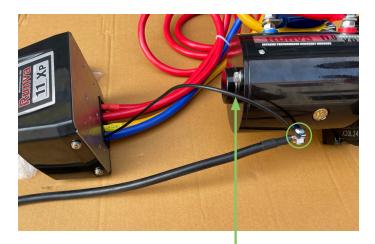

Detach the small black cable from the earth terminal on the winch motor.

- Switch your remote on by holding the power button for up to 5 seconds until the light turns on.
- 3. With the small cable and winch motor still in reach, press and hold the two buttons (winch in and winch out) on the winch remote at the same time (keep pressing them). At the same time also touch the small cable that you previously disconnected back onto the terminal until the red light on the remote becomes solid red.
- 4. The remote is now paired again so the small black cable can now be bolted back on.

